

Keywords: lna, rf, rfc, security, wireless, rf ics, low noise amplifier

APPLICATION NOTE 620

REP025: Custom-Tuned LNA at 345MHz for Wireless Security System

Jun 01, 2001

Abstract: The MAX2640 operates typically from 400MHz to 2500MHz. With the additional matching circuitry, it was made operational at 345MHz with a gain of almost 17dB and a noise figure (NF) of 1.4dB. ADS was used to simulate the design, and a network analyzer confirmed the performance. Measured S-parameters are provided, along with a schematic and bill of materials.


Rapid engineering prototypes are real circuits that Maxim application engineers have built and measured in our labs. They can provide a starting point for new RF designs.

Additional Information:

- [Wireless Product Line Page](#)
- [Quick View Data Sheet for the MAX2640](#)
- [Applications Technical Support](#)



Click here for an overview of the wireless components used in a typical radio transceiver.

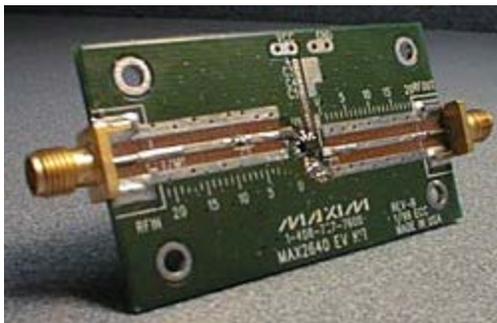

Objective: To tune the MAX2640 for operation at 345MHz for wireless security-system transmission.

The MAX2640 operates typically from 400MHz to 2500MHz, but with the addition of L_{new} and C_{new} it was made operational at 345MHz with a gain of almost 17dB and a noise figure (NF) of 1.4dB. L_{new} (approximately 43nH) was added to the circuit board by cutting the input trace right above the original ZM1 solder, required to match the LNA input, along with an input shunt capacitor C_{new} of 18pF. The matching line ZM1 was moved as well. An analog design system (ADS) was used to simulate and a network analyzer was used to correlate the new match response.

The MAX2640 is a low-cost ultra-low-noise amplifier designed for application in the cellular, PCS, GPS, and 2.4GHz ISM frequency band. It operates from a +2.7V to +5.5V supply, consuming only 3.5mA of

current while providing a low noise figure, high gain, high input, and a third-order intercept point (IP3). The MAX2640 offers a typical performance of 15.1dB gain, an input IP3 of -10dBm, and a noise figure of 0.9dB at 900MHz.

[Schematic of MAX2640 Tuned for 345MHz Performance](#)

[Bill of Materials of Tuned MAX2640](#)

[S-Parameter Measurements Plot1, S-Parameter Measurements Plot2](#)

[ADS Simulation Schematic](#)

[ADS Simulation Data](#)

Related Parts

[MAX2640](#)

300MHz to 2500MHz SiGe Ultra-Low-Noise Amplifiers

More Information

For Technical Support: <http://www.maximintegrated.com/support>

For Samples: <http://www.maximintegrated.com/samples>

Other Questions and Comments: <http://www.maximintegrated.com/contact>

Application Note 620: <http://www.maximintegrated.com/an620>

APPLICATION NOTE 620, AN620, AN 620, APP620, Appnote620, Appnote 620

Copyright © by Maxim Integrated Products

Additional Legal Notices: <http://www.maximintegrated.com/legal>